

PROJECT REFERENCE





Total Replacement of Mechanical Expansion Joint with Pourable Two Part Polyurethane System – All Seasons Place

Because of excessive water penetration problems and the fact that rain water was bypassing the surface “seal” of the joint the total replacement of the topping screed and existing “mechanical” expansion joint installed on the podium of All Seasons Place was considered to be the only available solution.

The proposal of a “two tier”, two part polyurethane jointing system by Hammersmith not only solved a major problem for the Client and building tenants, but resulted in significant cost and time savings.

A major advantage of the proposal was that no demolition or removal of the existing joint or surrounding screed was required and the building tenants were at no time inconvenienced by the works.

In excess of 1100 lm of failed joint were removed and replaced and, in conjunction with a programme of crack leak sealing by PU Injection, the car park rendered watertight.

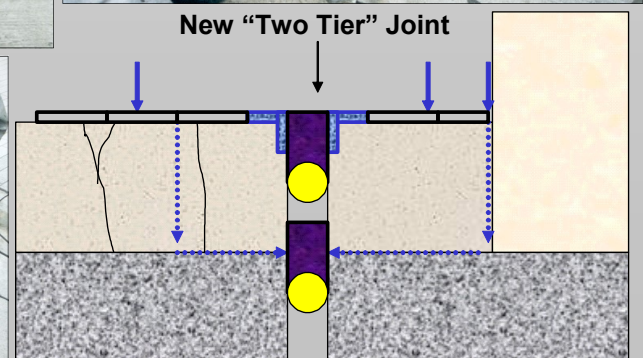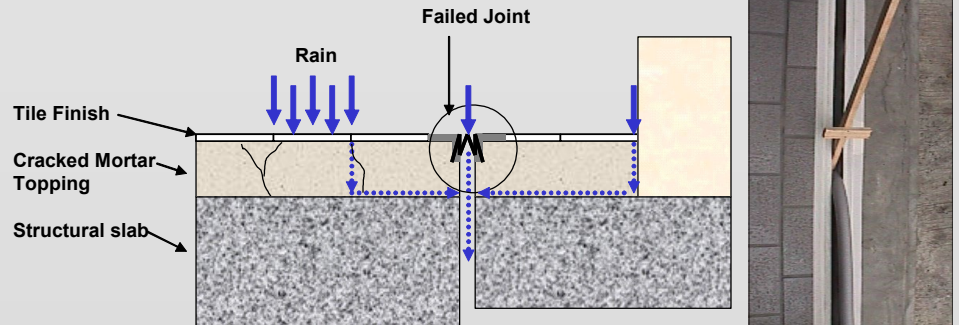

**“SPECIALIST SOLUTIONS
FOR THE
CONSTRUCTION INDUSTRY”**

HAMMERSMITH LIMITED
171 Soi Ladprao 26 , Ladprao Road,
Chompol, Chatuchak, Bangkok 10900
THAILAND
Phone: (662) 512-3480-2
Fax: (662) 512-3483
Email: email@hammersmithgroup.com
Web: www.hammersmithgroup.com

PROJECT DETAILS

Project Title	Re-Sealing of Expansion Joints – All Seasons Place
Client	All Seasons Property Co. Ltd.
Project Details	Supply and application of approximately 3500 Itrs (7,000 kg) of polyurethane based joint sealant
Completion Date	July 2002