



External Water-Bar Installation – National Starch, Karasin




Whether damaged during installation, incorrectly detailed or omitted all together, the failure of the waterproofing at the main construction joint between two primary waste water treatment tanks caused major problems for National Starch maintenance staff in Karasin.

The solution proposed by Hammersmith was the post installation of the Dila Joint Tape System.

Our unrivaled experience in the fields of polyurethane injection, concrete repair, waterproof membrane installation, expansion joint detailing and access to specifically designed materials allow us to offer a complete joint sealing service.

Repair Sequence Key

- 1 Failed construction joint
- 2 First pass PU injection
- 3 Forming chase
- 4 Second Pass PU injection
- 5 Installation
- 6 Surface repair

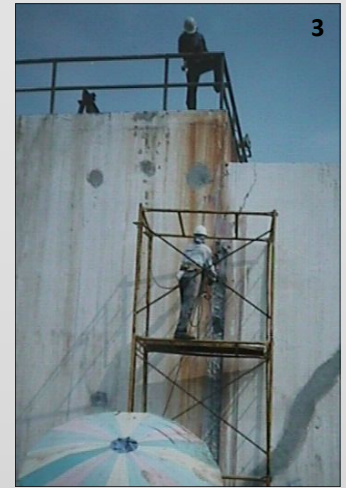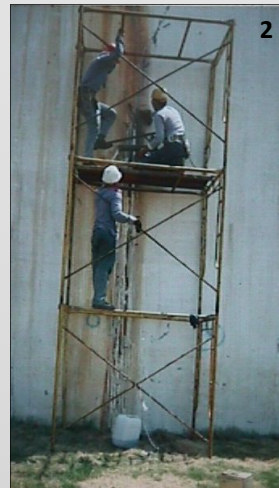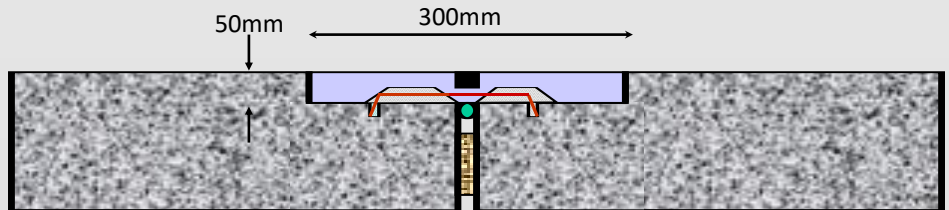

**"SPECIALIST SOLUTIONS
FOR THE
CONSTRUCTION INDUSTRY"**

HAMMERSMITH LIMITED

171 Soi Ladprao 26 , Ladprao Road,
Chompol, Chatuchak, Bangkok 10900
THAILAND

Phone: (662) 512-3480-2

Fax: (662) 512-3483

Email: email@hammersmithgroup.com

Web: www.hammersmithgroup.com